

2 WIRES VIDEO
DOOR ENTRY
SYSTEM WITH
MIFARE RFID
ACCESS CONTROL







2 WIRES VIDEO DOOR ENTRY SYSTEM WITH MIFARE RFID ACCESS CONTROL

General features





Non-polarized 2 wires system



Digital outdoor panel in stainless steel with high quality color camara



New Outdoor Panels with Push Buttons



Auto-adjusting light sensor



Compatible with outdoor door lock



LCD display with simple and intuitive directory



Audio call volume adjustment on monitor



Up to 4 outdoor panels and up to 32 users (64 indoor units max)



Extension Unit for Over 32 Monitors



Monitoring function.
Possible to watch
the street without
prior call



Easy to install and to program



Integrated MIFARE access control



Paralell or series installation option



It can be used as replacement using existing cabling



SD card slot



Opción de cámaras CCTV adicionales



Additional CCTV cameras option












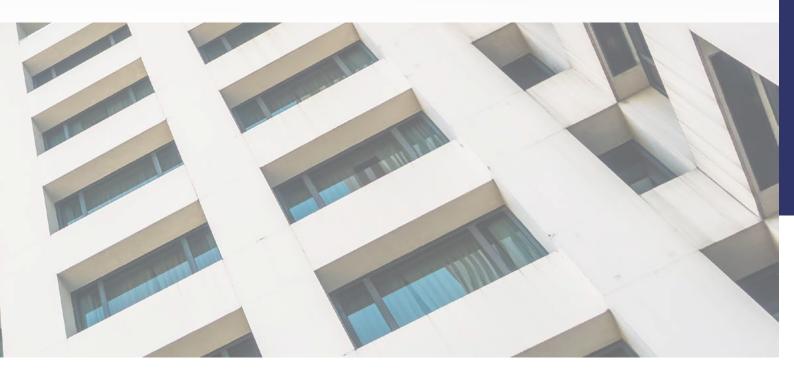



Outdoor panel











SURFACE OR FLUSH MOUNTING OPTIONS

SURFACE MOUNTING

FLUSH MOUNTING











Black outdoor panel option **PCD-E-B**



Integration with **PD** directory



Outdoor panels 1, 2, 4, 6, 8 buttons. PE 1BM, PE 2B, PE 4B, PE 6B, PE 8B



- √ Outdoor panel with camera 1, 2, 46 and 8 buttons
- √ Surface installation
- √ With protection frame
- √ Includes visor Mifare (PE 1BM)

Audio indoor unit UAD





MON 43V Monitor



- √ High quality 4,3" color display
- √ Hands-free
- √ Outdoor monitoring using the outdoor panel camera
- √ Outdoor monitoring using the outdoor panel camera

MON 43W Monitor



- √ WiFi High quality 4,3" color display
- √ Hands-free
- √ Outdoor monitoring using the outdoor panel camera
- √ Outdoor monitoring using the outdoor panel camera

Call answering from smartphone



PFA 2420 Power supply



- √ 2 wires BUS system power supply
- ✓ Central system power supply.
 PCD-E outdoor panel and DPL-4/
 DPL-4F splitters intercom module

DPL-4/DPL-4F splitters



- √ 4 outputs floor splitters
- √ cascadable and terminal models
- √ Splitting isolation and electrical protection for all apartment systems in the building
- √ Use DPL-4F terminal splitter as last splitter to close the line



Extension and regeneration unit EXT 32



- $\sqrt{}$ Extension and regeneration unit
- √ Required for installations with more than 32 addresses/monitors

Power supply PFA 2425



√ DIN rail supply 24Vdc/2.5A for EXT 32



Accessories

CE PCD	Flush box for PCD E
VE-AI	Stainless steel protective frame for PCD E outdoor panel
VPS	Protective plastic box for surface mounted PCD E outdoor panel
RF KEY	Mifare type RFID key
CVP 2	2-wire cable 0.5mm2. 250m reel. Floor wiring
CVP 2-1,5	2-wire cable 1.5mm2. 200m reel. Long distances wiring













KIT HOME



- Single-Family Video Door Kit
- Installation with 2 non-polarized wires
- Outdoor panel with camera, push button, and Mifare access control
- Hands-free 4.3-inch color monitor with wall-mount support
- DIN rail installation power supply
- Expandable up to 4 monitors and 2 outdoor panels



- Single-Family Video Door Kit
- Installation with 2 non-polarized wires
- Outdoor panel with camera, push button, and Mifare access control
- Hands-free 4.3-inch color monitor with wall-mount support
- Wi-Fi Connection for Call Forwarding and Remote Door Opening via Smartphone using the EK SMART App
- DIN rail installation power supply
- Expandable up to 4 monitors and 2 outdoor panels














Dimensions
















DPL-4 / DPL-4F



Examples of installation schemes

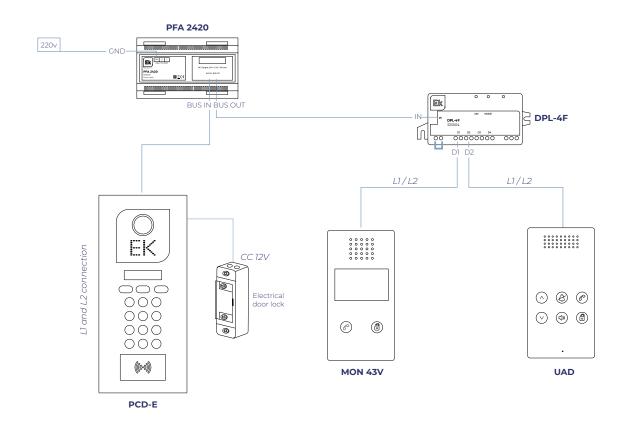

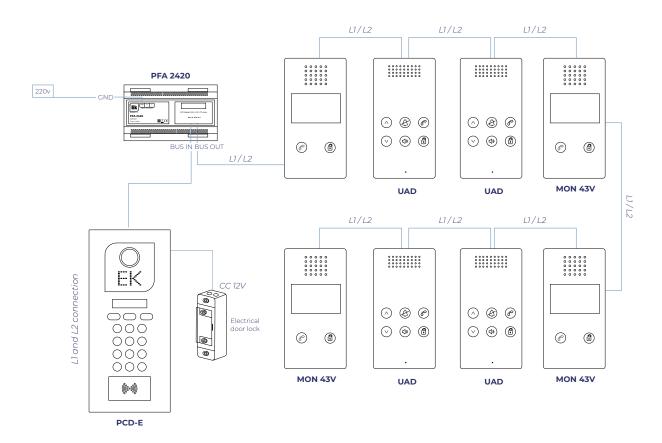



MALETÍN WIFI DEMO · MALETÍN DEMO





EKSELANS by ITS ITS Partner O.B.S. S.L

Av. Cerdanyola 79-81 Local C 08172 Sant Cugat del Vallès Barcelona (España) Tel: +34 93 583 95 43 info@ek.plus www.ek.plus