

# MIXERS

## MI 2 TS L2


Lte2

- ✓ Low losses
- ✓ Current pass on UHF or SAT inputs
- ✓ Shielding factor
- ✓ Class A
- ✓ Weather protection (optional)

**Ek** EKSELANS BY ITS



MI 2 TS L2

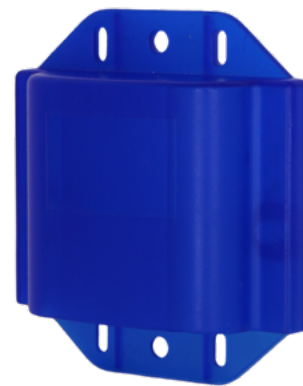

PMM

## TECHNICAL INFORMATION

REFERENCE		MI 2 TS L2	
Code		131004	
Inputs		TER	SAP
Frequencies	MHz	5-694	950-2400
Insertion Losses	dB	1	1,5
Isolation	dB	30	25
Current Pass	mA	-	500

REFERENCE	PMM	DESCRIPTION
Code	024001	Outdoor installation cover