



EKSELANS BY ITS

AX
WiFi SERIES

CLOUD
 **PRO**

**PROFESSIONAL RANGE
OF WI-FI ACCESS POINTS,
MANAGED POE SWITCHES,
CONTROLLERS, AND
CLOUD PLATFORM**



ENTER THE EK WORLD

ACCESS POINTS



AX 3000

331019

Indoor WiFi 6
access point



AX 3000P

331020


WiFi 6 access point for
indoor wall-mounted
installations



AX 3000LP

331021

Outdoor omnidirectional
WiFi 6 access point

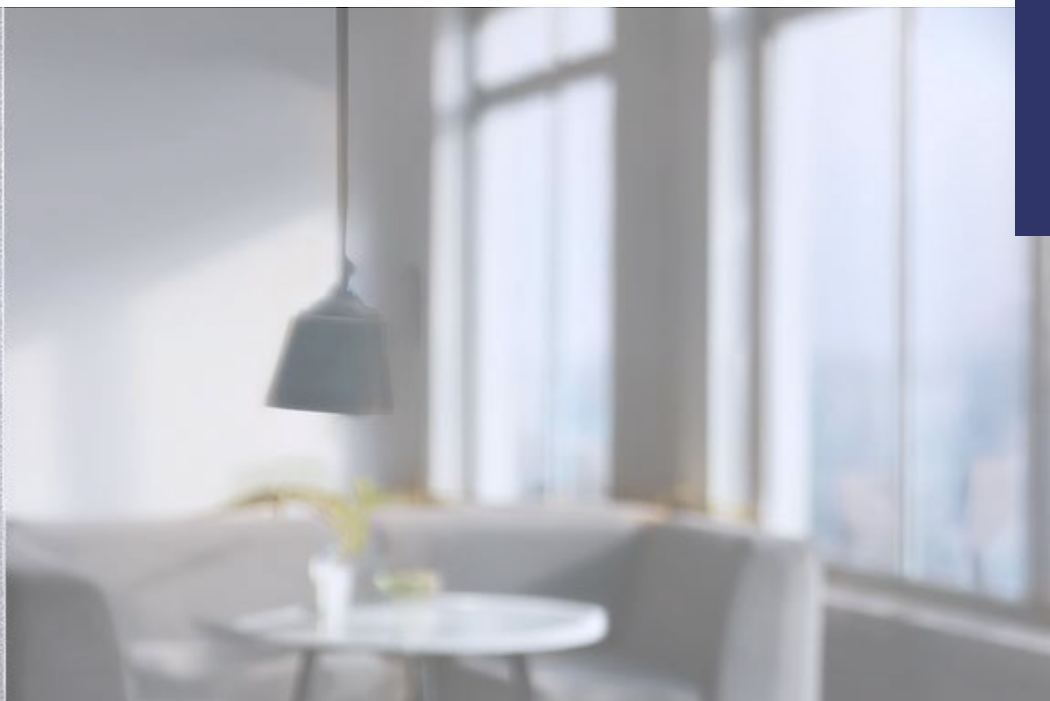

SWITCH



SWG 24-AX

334201

24-port GE PoE+
managed switch with 4
SFP ports

CONTROLLER




UC-AX

331022

Controller for WiFi
networks

MOBILE APPLICATIONS

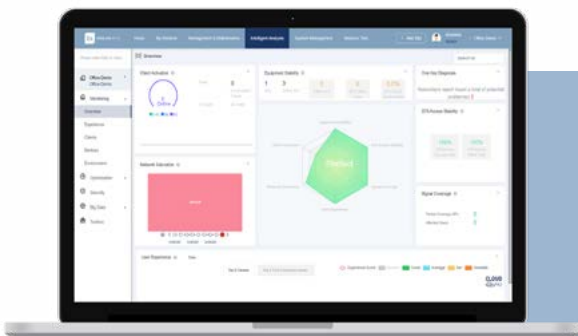

CLOUD PRO

Unified Cloud-Based
WiFi Network
Management Platform


CLOUD PRO

**UNIFIED CLOUD-BASED WiFi NETWORK
MANAGEMENT PLATFORM**


CLOUD PRO

UNIFIED CLOUD-BASED WiFi NETWORK MANAGEMENT PLATFORM


For more information:
<https://ek.plus/>

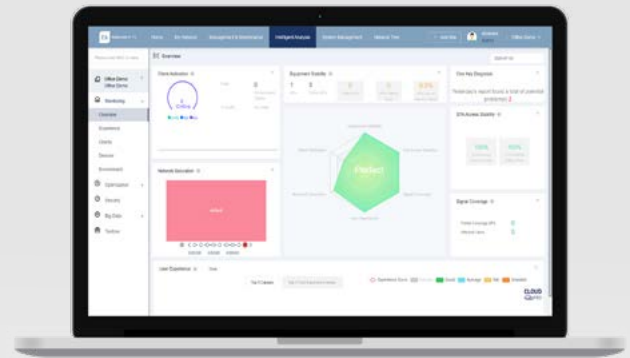


Enables the design, deployment, configuration, operation, and real-time analysis of WiFi networks

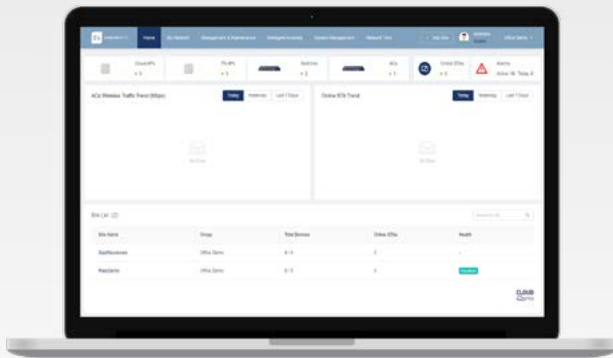


Management of all network devices: access points, switches, and controllers

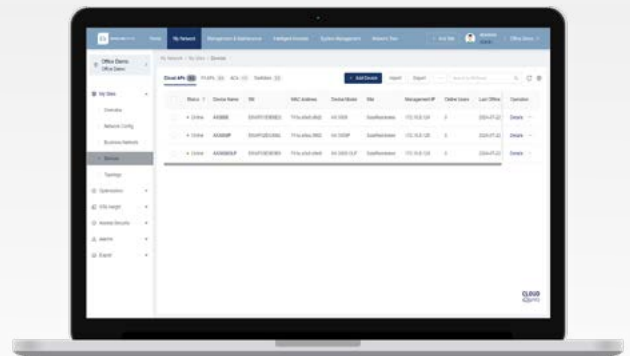

Remote execution of monitoring and diagnostic tasks for device connection status, configuration deployment, firmware updates, equipment reboots, and more

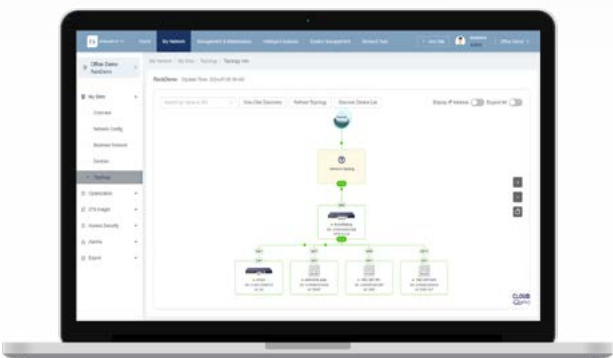

Automatic network provisioning option with auto-identification of the network topology

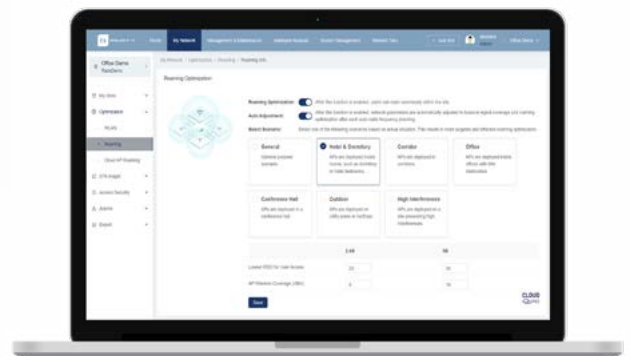

Network optimization and smart roaming between devices

WiFi ACCESS POINTS



INDOOR WiFi 6 ACCESS POINT

Hardware

| REFERENCE | AX 3000 |
|------------------------|---|
| Code | 331019 |
| 802.11n | <p>Four spatial streams</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams - Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 20 MHz and 40 MHz - Radio 2 – 5 GHz: 20 MHz and 40 MHz <p>Combined peak data rate: 600 Mbps</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) - Radio 2 – 5 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS31) <p>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> - Aggregate MAC Protocol Data Unit (A-MPDU) - Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS) / Cyclic Delay/Shift Diversity (CDD/CSD) / Maximum Ratio Combining (MRC) / Space-Time Block Coding (STBC) / Low-Density Parity Check (LDPC) / Transmit beam-forming (TxBF)</p> |
| 802.11ac | <p>Two spatial streams</p> <ul style="list-style-type: none"> - Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> - Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 1.733 Gbps</p> <ul style="list-style-type: none"> - Radio 2 – 5 GHz: 6.5 Mbps to 1.733 Gbps (MCS0 to MCS9) <p>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> - Aggregate MAC Protocol Data Unit (A-MPDU) - Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS) / Cyclic Delay/Shift Diversity (CDD/CSD) / Maximum Ratio Combining (MRC) / Space-Time Block Coding (STBC) / Low-Density Parity Check (LDPC) / Transmit beam-forming (TxBF)</p> |
| 802.11ax | <p>Four spatial streams</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams - Radio 2 – 5 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 20 MHz and 40 MHz - Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 2.976 Gbps:</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 8.6 Mbps to 0.574 Gbps (MCS0 to MCS11) - Radio 2 – 5 GHz: 8.6 Mbps to 2.402 Gbps (MCS0 to MCS11) <p>Radio technologies: uplink/downlink Orthogonal Frequency-Division Multiple Access (OFDMA)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> - Aggregate MAC Protocol Data Unit (A-MPDU) - Aggregate MAC Service Data Unit (A-MSDU) <p>Dynamic Frequency Selection (DFS) / Cyclic Delay/Shift Diversity (CDD/CSD) / Maximum Ratio Combining (MRC) / Space-Time Block Coding (STBC) / Low-Density Parity Check (LDPC) / Transmit beam-forming (TxBF) / WPA3</p> |
| Antennas | <p>Wi-Fi</p> <ul style="list-style-type: none"> - 2.4 GHz: two built-in omnidirectional smart antennas, the max. antenna gain is 5 dBi. - 5 GHz: two built-in omnidirectional smart antennas, the max. antenna gain is 5.7 dBi. <p>Bluetooth</p> <ul style="list-style-type: none"> - One onboard omnidirectional antenna, the max. antenna gain is 2.4 dBi. |
| Ports | <p>1 x 10/100/1000Base-T RJ45 Ethernet port with auto-negotiation</p> <p>1 x 1/2.5Gcombo SFP port</p> <p>1 x RJ45 console port (serial console port)</p> <p>1 x Bluetooth 5.1</p> |
| Status LED | <p>1 x multi-color system status LED</p> <ul style="list-style-type: none"> - AP power-on status - Software initialization status and upgrade status - Uplink service interface status - Wireless user online status - CAPWAP tunnel timeout - Specific AP locating |
| Button | <p>1 x Reset button</p> <ul style="list-style-type: none"> - Press the button for shorter than 2 seconds. Then the device restarts. - Press the button for longer than 5 seconds. Then the device restores to factory settings. |
| Dimensions (W x D x H) | <p>Main unit: 220 mm x 220 mm x 49 mm (8.66 in. x 8.66 in. x 1.93 in.)</p> <p>Shipping: 507 mm x 319 mm x 278 mm (19.96 in. x 12.56 in. x 10.94 in.)</p> |

AX 3000

- ✓ Dual-band WiFi (2.4 GHz + 5 GHz) IEEE 802.11b/g/n/ac/ax
- ✓ Maximum data speed up to 2.976 Gbps
- ✓ 4 spatial streams
- ✓ MU-MIMO and WMM systems
- ✓ Fast-Intelligent-Roaming (IEEE 802.11k/v/r)
- ✓ Maximum transmission power: 26dBm
- ✓ High WiFi network quality and efficiency (RF power adjustment and intelligent channel allocation)
- ✓ Local and remote management via CloudPRO
- ✓ 1Gbps connection via copper structured cabling (RJ45 connector) or 2.5Gbps via fiber optic (SFP)
- ✓ 48Vdc PoE IEEE802.3af power supply (alternative external PSU)
- ✓ Bluetooth 5.1
- ✓ High-security protocols (WPA2/802.1X, WPA3P/WPA3 Enterprise)



AX 3000



| | |
|---------------------|--|
| Weight | Main unit: 0.6 kg (1.33 lbs) Mounting bracket: 0.2 kg (0.44 lbs) Shipping: 1.04 kg (2.29 lbs) |
| Mounting | Wall/Ceiling-mount (a mounting bracket is delivered with the main unit) |
| Lock option | Kensington lock and securing latch |
| Input power supply | The AP supports the following two power supply modes: - 48 Vdc/0.6 A power input over DC connector. The DC connector accepts 2.1 mm/5.5 mm center-positive circular plug. A DC power supply needs to be purchased independently. - PoE input over LAN 1: The power source equipment (PSE) complies with IEEE 802.3af standard (PoE). |
| Power consumption | Maximum power consumption: 12.95 W - Vdc power: 12.95 W - 802.3bt (PoE+): 12.95 W - 802.3at (PoE+): 12.95 W - 802.3af (PoE): 12.95 W - Idle mode: 6 W |
| Environment | Storage temperature: -40°C to +70°C (-40°F to +158°F) Storage humidity: 0% RH to 95% RH (non-condensing) Operating temperature: -10°C to +50°C (14°F to 122°F) Operating humidity: 0% RH to 95% RH (non-condensing) |
| Max. transmit power | 2.4 GHz: 26 dBm (398 mW) / 5 GHz: 26 dBm (398 mW) |


Software

| | |
|--------------------------------|--|
| WLAN | |
| Max. number of associated STAs | 256 (up to 128 STAs per radio) |
| Max. number of BSSIDs | 32 (up to 16 BSSIDs per radio) |
| WLAN service | Max. number of WLAN IDs: 16 Max. number of associated STAs per WLAN: 32 |
| STA management | SSID hiding Each SSID can be configured with the authentication mode, encryption mechanism, and VLAN attributes independently. Remote Intelligent Perception Technology (RIPT) Intelligent STA identification technology Intelligent load balancing based on the STA quantity or traffic |
| STA limiting | SSID-based STA limiting Radio-based STA limiting |
| Bandwidth limiting | STA/SSID/AP-based rate limiting |
| CAPWAP | IPv4/IPv6 CAPWAP CAPWAP through NAT Encryption over CAPWAP data channels Encryption over CAPWAP control channels |
| Data forwarding | Centralized and local forwarding |
| Wireless roaming | Layer 2 and Layer 3 roaming |
| Wireless locating | MU device locating |
| Security and Authentication | |
| Authentication and encryption | Remote Authentication Dial-In User Service (RADIUS) PSK, PPSK, UPSK, PEAP and web authentication QR code-based guest authentication, SMS authentication, and MAC address bypass (MAB) authentication (used with RC-WS series ACs) Data encryption: WEP (64/128 bits), WPA-TKIP, WPA-PSK, WPA2-AES, WPA3-Individual, WPA3-Enterprise |
| Data frame filtering | Allowlist, static blocklist, and dynamic blocklist |
| WIDS | Rogue device discovery Optimization of rogue AP containment for all STA types Fuzzy containment SSID-based blocklist DDoS attack identification Automatic detection of STA attacks, and adding STAs to the blocklist when ICMP attacks or TCP SYN attacks are detected STA isolation |


| | |
|--|---|
| ACL | IP standard ACL, MAC extended ACL, IP extended ACL, and expert-level ACL IPv6 ACL Time range-based ACL ACL based on a Layer 2 interface ACL based on a Layer 3 interface Ingress ACL based on a wireless interface ACL Remark Dynamic ACL assignment based on 802.1X authentication (used with the AC) |
| CPP | CPU Protect Policy (CPP) |
| NFPP | Network Foundation Protection Policy (NFPP) |
| Routing and Switching | |
| MAC | Static and filtered MAC addresses MAC address table size: 1,024 Max. number of static MAC addresses: 1,024 Max. number of filtered MAC addresses: 1,024 |
| Ethernet | Jumbo frame length: 1,518 Ethernet II frame format 1000M SFP ports 2.5GE interfaces |
| VLAN | Interface-based VLAN assignment Max. number of SVIs (IPv4): 200 Max. number of SVIs (IPv6): 200 Max. number of VLANs: 4,094 VLAN ID range: 1-4,094 |
| ARP | ARP entry aging, gratuitous ARP learning, and proxy ARP Max. number of ARP entries: 1,024 ARP check |
| IPv4 services | Static and DHCP-assigned IPv4 addresses Max. number of IPv4 addresses configured on each Layer 3 interface: 200 NAT, FTP ALG and DNS ALG |
| IPv6 services | IPv6 addressing, Neighbor Discovery (ND), ICMPv6, IPv6 ping, IPv6 tracer IPv6 DHCP client |
| IP routing | IPv4/IPv6 static route Max. number of static IPv4 routes: 1,024 Max. number of static IPv6 routes: 1,000 |
| Multicast | Multicast-to-unicast conversion |
| VPN | PPPoE client IPsec VPN |
| Network Management and Monitoring | |
| Network management | NTP server and NTP client SNTP client SNMPv1/v2c/v3 Fault detection and alarms Information statistics and logging |
| Network management platform | Direct connection via web management Remote connection via CloudPRO by EK |
| User access management | Console, Telnet, SSH, FTP client, FTP server, and TFTP client |
| Switchover among Fat, Fit, and cloud modes | When the AP works in Fit mode, it can be switched to Fat mode through acontroller (UC AX) When the AP works in Fat mode, it can be switched to Fit mode through the console port or Telnet mode. When the AP works in cloud mode, it can be managed through CloudPRO by EK. |

Antenna Pattern Plots

Horizontal Plane (Top View)

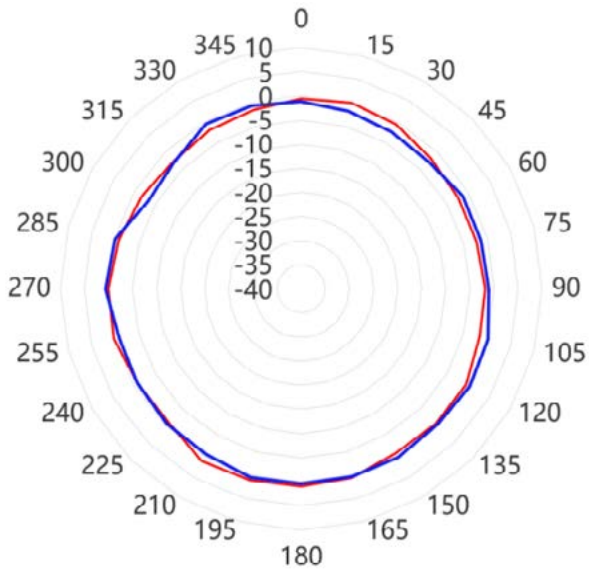


— 2.4 GHz Azimuth Plane Theta=60°
— 2.4 GHz Azimuth Plane Theta=90°

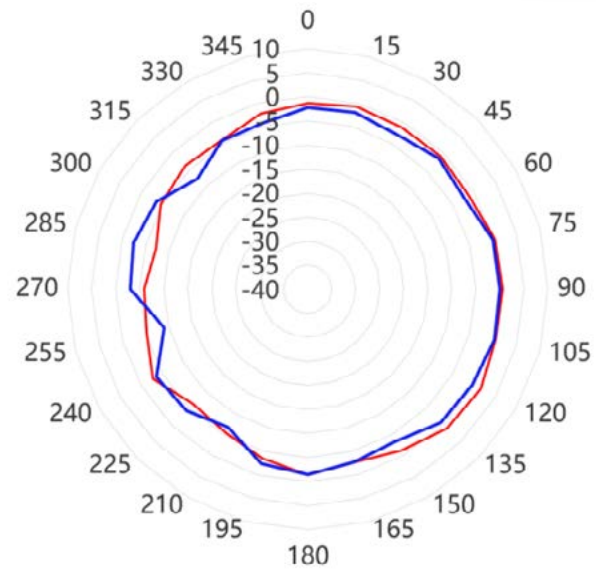


— 5 GHz Azimuth Plane Theta=60°
— 5 GHz Azimuth Plane Theta=90°

Vertical Plane (Side View, AP Facing Down)

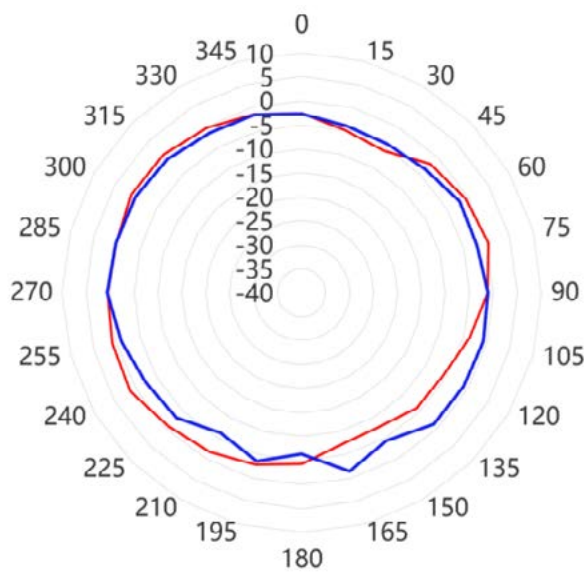

— 2.4 GHz Azimuth Plane Phi=0°
— 2.4 GHz Azimuth Plane Phi=90°

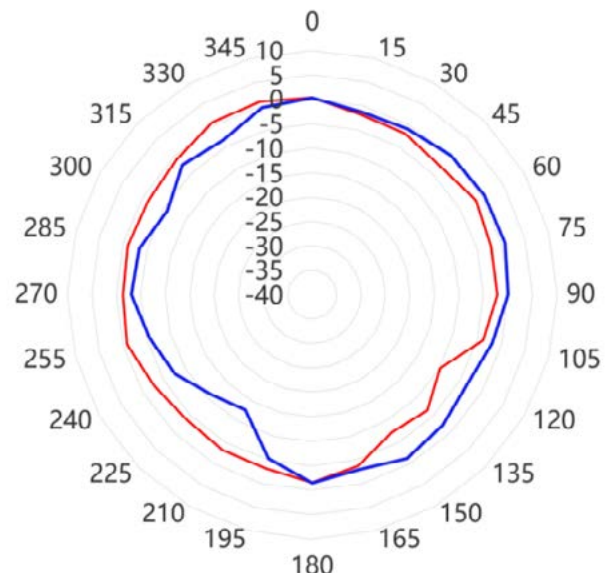


— 5 GHz Azimuth Plane Phi=0°
— 5 GHz Azimuth Plane Phi=90°

| REFERENCE | AX 3000P |
|-----------|---|
| Code | 331020 |
| 802.11n | <p>Four spatial streams Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams Channels: Radio 1 – 2.4 GHz: 20 MHz and 40 MHz Radio 2 – 5 GHz: 20 MHz and 40 MHz Combined peak data rate: 600 Mbps Radio 1 – 2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) Radio 2 – 5 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM) Modulation types: BPSK, QPSK, 16-QAM, 64-QAM Packet aggregation: Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) Dynamic Frequency Selection (DFS) Cyclic Delay/Shift Diversity (CDD/CSD) Maximum Ratio Combining (MRC) Space-Time Block Coding (STBC) Low-Density Parity Check (LDPC) Transmit beam-forming (TxBF)</p> |
| 802.11ac | <p>Two spatial streams Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams Channels: Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz Combined peak data rate: 1.733 Gbps Radio 2 – 5 GHz: 6.5 Mbps to 1.733 Gbps (MCS0 to MCS9) Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM) Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM Packet aggregation: Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) Dynamic Frequency Selection (DFS) Cyclic Delay/Shift Diversity (CDD/CSD) Maximum Ratio Combining (MRC) Space-Time Block Coding (STBC) Low-Density Parity Check (LDPC) Transmit beam-forming (TxBF)</p> |
| 802.11ax | <p>Four spatial streams Radio 1 – 2.4 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams Radio 2 – 5 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams Channels: Radio 1 – 2.4 GHz: 20 MHz and 40 MHz Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz Combined peak data rate: 2.976 Gbps: Radio 1 – 2.4 GHz: 8.6 Mbps to 0.574 Gbps (MCS0 to MCS11) Radio 2 – 5 GHz: 8.6 Mbps to 2.402 Gbps (MCS0 to MCS11) Radio technologies: uplink/downlink Orthogonal Frequency-Division Multiple Access (OFDMA) Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM Packet aggregation: Aggregate MAC Protocol Data Unit (A-MPDU) Aggregate MAC Service Data Unit (A-MSDU) Dynamic Frequency Selection (DFS) Cyclic Delay/Shift Diversity (CDD/CSD) Maximum Ratio Combining (MRC) Space-Time Block Coding (STBC) Low-Density Parity Check (LDPC) Transmit beam-forming (TxBF) WPA3</p> |
| Antennas | <p>Wi-Fi 2.4 GHz: two built-in omnidirectional antennas, the max. antenna gain is 5.2 dBi. 5 GHz: two built-in omnidirectional antennas, the max. antenna gain is 6 dBi. Bluetooth One onboard omnidirectional antenna, with the peak gain of 2.4 dBi</p> |
| Ports | <p>Uplink: 1 x 100/1000/2500Base-T Ethernet port with auto-negotiation, in compliance with IEEE 802.3af/at (PoE/PoE+). When powered by 802.3af (PoE), LAN 1 port cannot supply power to external devices. Downlink: 4 x 10/100/1000Base-T Ethernet ports with auto-negotiation. LAN 1 port can source 48 V/10 W power to external devices. 1 x micro USB console port 1 x Bluetooth 5.1</p> |

WiFi 6 ACCESS POINT FOR INDOOR WALL-MOUNTED

AX 3000P

- ✓ Designed for wall mounting
- ✓ Dual-band WiFi (2.4 GHz + 5 GHz) IEEE 802.11b/g/n/ac/ax
- ✓ Maximum data rate of up to 2.976 Gbps
- ✓ 4 spatial streams
- ✓ MU-MIMO and WMM systems
- ✓ Fast-Intelligent-Roaming (IEEE 802.11k/v/r)
- ✓ Maximum transmission power 20dBm
- ✓ High-quality and efficient WiFi network (RF power adjustment and intelligent channel allocation)
- ✓ Local and remote management via CloudPRO
- ✓ 1Gbps connectivity via structured copper cabling (4 RJ45 ports)
- ✓ PoE power IEEE802.3af 48Vdc (alternatively via local power supply)
- ✓ 48Vdc PoE output through LAN1 port
- ✓ Bluetooth 5.1
- ✓ High-security protocols (WPA3-Personal, WPA3-Enterprise)

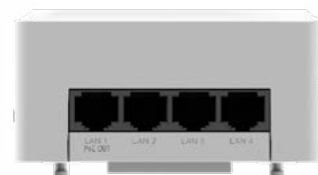

| | |
|------------------------|--|
| Status LED | 1 x multi-color system status LED - AP power-on status - Software initialization status and upgrade status - Uplink service interface status - CAPWAP tunnel timeout - Specific AP locating |
| Button | 1 x Reset button - Press the button for shorter than 2 seconds. Then the device restarts. - Press the button for longer than 5 seconds. Then the device restores to factory settings. |
| Dimensions (W x D x H) | Main unit: 86 mm x 170 mm x 43 mm (3.39 in. x 6.69 in. x 1.69 in.) Shipping: 104 mm x 187 mm x 69 mm (4.10 in. x 7.37 in. x 2.72 in.) |
| Weight | Main unit: 0.3 kg (0.66 lbs) Mounting bracket: 0.1 kg (0.22 lbs) Shipping: 0.54 kg (1.19 lbs) |
| Mounting | Installation in European and American standard junction boxes, and wall mounting (one mounting bracket is supplied with the product) |
| Lock option | Kensington lock |
| Input power supply | - The AP supports the following two power supply modes: - - 48 Vdc/0.6 A power input over DC connector: The DC connector accepts 2.1 mm/5.5 mm center-positive circular plug. - A DC power supply needs to be purchased independently. - - PoE input via rear LAN: The power sourcing equipment (PSE) complies with the IEEE 802.3af (PoE) standard If both DC power and PoE are available, DC power is preferred. |
| Power consumption | Maximum power consumption: 25 W Vdc power: 25 W, 2.4 GHz radio 2x2, 5 GHz radio 2x2, LAN 1 for PoE supply 802.3at (PoE+): 25 W, 2.4 GHz radio 2x2, 5 GHz radio 2x2, LAN 1 for PoE supply 802.3af (PoE): 15 W, 2.4 GHz radio 2x2, 5 GHz radio 2x2, LAN 1 port that fail to provide power for external devices (PoE out disabled of LAN 1 port disabled) Idle mode: 8 W |
| Environment | Storage temperature: -40°C to +70°C (-40°F to +158°F) Storage humidity: 5% RH to 95% RH (non-condensing) Operating temperature: -10°C to +45°C (14°F to 113°F) Operating humidity: 5% RH to 95% RH (non-condensing) |
| Max transmit power | 2.4 GHz: 20 dBm (100 mW) 5 GHz: 20 dBm (100 mW) |

Software


| | |
|--------------------------------|--|
| WLAN | |
| Max. number of associated STAs | 256 (up to 128 STAs per radio) |
| Max. number of BSSIDs | 32 (up to 16 BSSIDs per radio) |
| Max. number of WLAN IDs | 16 |
| STA management | SSID hiding Each SSID can be configured with the authentication mode, encryption mechanism, and VLAN attributes independently. Remote Intelligent Perception Technology (RIPT) Intelligent STA identification technology Intelligent load balancing based on the STA quantity or traffic Rate set settings |
| STA limiting | SSID-based STA limiting Radio-based STA limiting |
| Bandwidth limiting | STA/SSID/AP-based rate limiting |
| CAPWAP | IPv4/IPv6 CAPWAP Layer 2 and Layer 3 topology between an AP and an AC An AP can automatically discover the accessible AC. An AP can be automatically upgraded through the AC. An AP can automatically download the configuration file from the AC. CAPWAP through NAT MTU setting and fragmentation over CAPWAP tunnels Encryption over CAPWAP data channels Encryption over CAPWAP control channels |
| Data forwarding | Centralized and local forwarding |
| Wireless roaming | Layer 2 and Layer 3 roaming |
| Wireless locating | MU device locating |
| Security and Authentication | |
| Authentication and encryption | Remote Authentication Dial-In User Service (RADIUS) PSK and web authentication QR code-based guest authentication, SMS authentication, and MAC address bypass (MAB) authentication Data encryption: WEP (64/128 bits), WPA-TKIP, WPA-PSK, WPA2-AES, WPA3-Individual, WPA3-Enterprise |

| | |
|--|--|
| Data frame filtering | Allowlist, static blocklist, and dynamic blocklist |
| WIDS | Rogue device discovery Optimization of rogue AP containment for all STA types Fuzzy containment SSID-based blocklist DDoS attack identification Automatic detection of STA attacks, and adding STAs to the blocklist when ICMP attacks or TCP SYN attacks are detected STA isolation |
| ACL | IP standard ACL, MAC extended ACL, IP extended ACL, and expert-level ACL Time range-based ACL ACL based on a Layer 2 interface ACL based on a Layer 3 interface Ingress ACL based on a wireless interface Dynamic ACL assignment based on 802.1X authentication (used with the AC) |
| CPP | CPU Protect Policy (CPP) |
| NFPP | Network Foundation Protection Policy (NFPP) |
| Routing and Switching | |
| MAC | Static and filtered MAC addresses MAC address table size: 1,024 Max. number of static MAC addresses: 1,024 Max. number of filtered MAC addresses: 1,024 |
| Ethernet | Jumbo frame length: 1,518 Full-duplex and half-duplex modes of interfaces IEEE802.1p and IEEE802.1Q |
| VLAN | Interface-based VLAN assignment Max. number of SVIs: 200 Max. number of VLANs: 4,094 VLAN ID range: 1-4,094 |
| ARP | ARP entry aging and proxy ARP Max. number of ARP entries: 1,024 ARP check |
| IPv4 services | Static and DHCP-assigned IPv4 addresses Max. number of IPv4 addresses configured on each Layer 3 interface: 200 NAT, FTP ALG and DNS ALG |
| IPv6 services | IPv6 addressing, Neighbor Discovery (ND), ICMPv6, IPv6 ping, IPv6 traceret IPv6 DHCP client |
| IP routing | IPv4/IPv6 static route Max. number of static IPv4 routes: 1,024 Max. number of static IPv6 routes: 1,000 |
| Multicast | Multicast-to-unicast conversion |
| VPN | PPPoE client IPsec VPN |
| Network Management and Monitoring | |
| Network management | NTP server and NTP client SNTP client SNMPv1/v2c/v3 Fault detection and alarm Information statistics and logging |
| Network management platform | Direct connection via web management Remote connection via CloudPRO by EK |
| User access management | Telnet and TFTP Management |
| Switchover among Fat, Fit, and cloud modes | When the AP works in Fit mode, it can be switched to Fat mode through an UC AX. When the AP works in Fat mode, it can be switched to Fit mode through the console port or Telnet mode. When the AP works in cloud mode, it can be managed through CloudPRO by EK. |


Antenna Pattern Plots

Horizontal Plane (Top View)

2.45G Wi-Fi XY plane (antenna2,3)

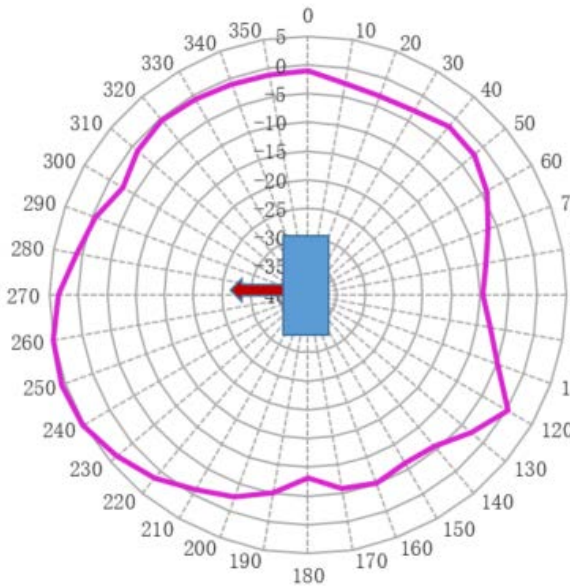


5.5G Wi-Fi XY plane (antenna2,3)

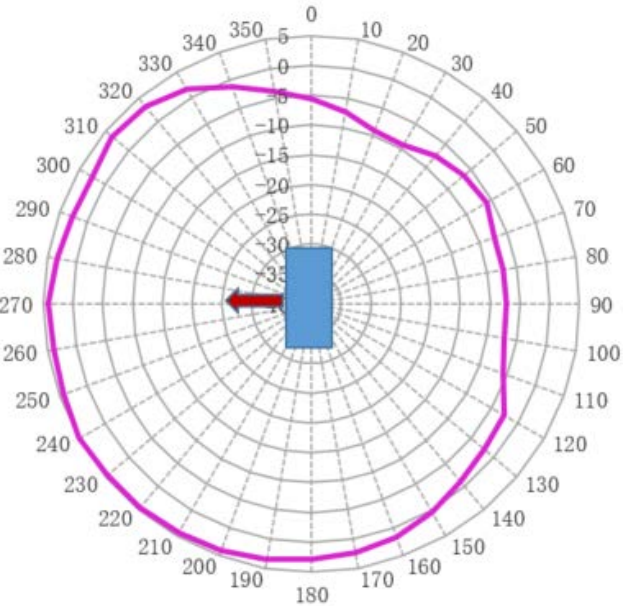


Vertical Plane (Side View, AP Facing Down)

2.45G Wi-Fi YZ plane (antenna2,3)

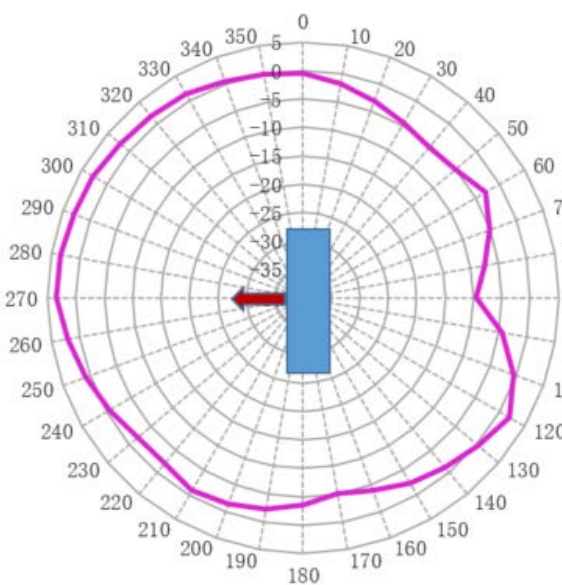


5.5G Wi-Fi YZ plane (antenna2,3)

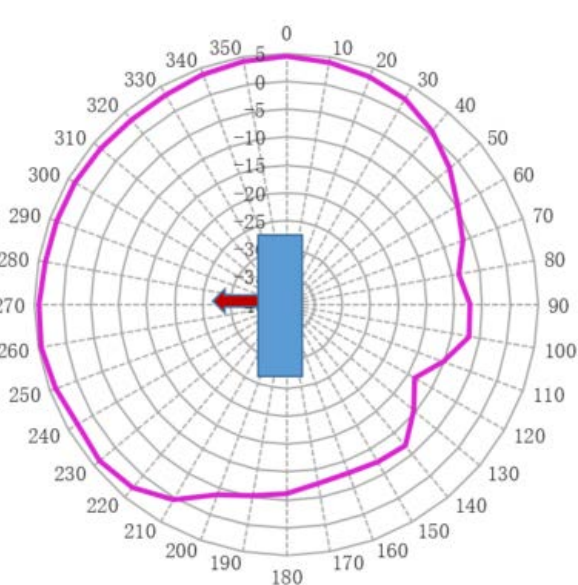


Vertical Plane (Front View)

2.45G Wi-Fi XZ plane (antenna2,3)

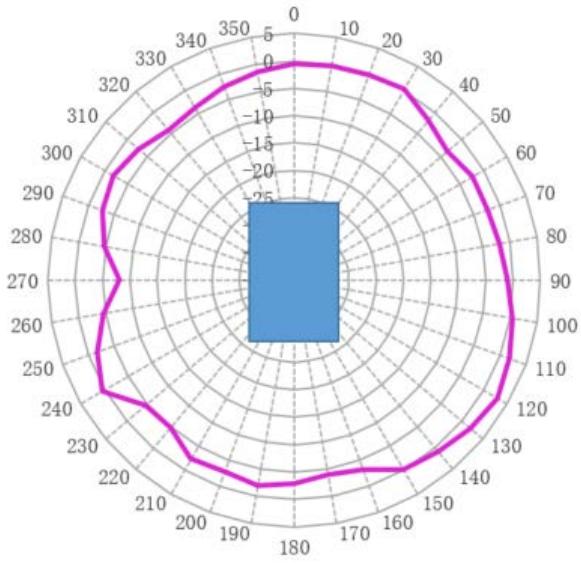

5.5G Wi-Fi XZ plane (antenna2,3)

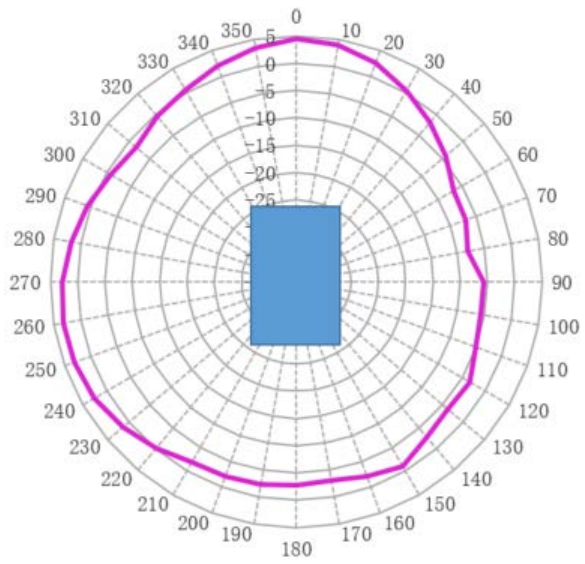

Hardware

| REFERENCE | AX 3000 OLP |
|------------|--|
| Code | 331021 |
| 802.11n | <p>Four spatial streams</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams - Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 20 MHz and 40 MHz - Radio 2 – 5 GHz: 20 MHz and 40 MHz <p>Combined peak data rate: 600Mbps</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) - Radio 2 – 5 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) <p>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> - Aggregate MAC Protocol Data Unit (A-MPDU) - Aggregate MAC Service Data Unit (A-MSDU) - Dynamic Frequency Selection (DFS) - Cyclic Delay/Shift Diversity (CDD/CSD) - Maximum Ratio Combining (MRC) - Space-Time Block Coding (STBC) - Low-Density Parity Check (LDPC) - Transmit beam-forming (TxBF) |
| 802.11ac | <p>Two spatial streams</p> <ul style="list-style-type: none"> - Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> - Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 1.733 Gbps</p> <ul style="list-style-type: none"> - Radio 2 – 5 GHz: 6.5 Mbps to 1.733 Gbps (MCS0 to MCS9) <p>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> - Aggregate MAC Protocol Data Unit (A-MPDU) - Aggregate MAC Service Data Unit (A-MSDU) - Dynamic Frequency Selection (DFS) - Cyclic Delay/Shift Diversity (CDD/CSD) - Maximum Ratio Combining (MRC) - Space-Time Block Coding (STBC) - Low-Density Parity Check (LDPC) - Transmit beam-forming (TxBF) |
| 802.11ax | <p>Four spatial streams</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams - Radio 2 – 5 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams <p>Channels:</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 20 MHz and 40 MHz - Radio 2 – 5 GHz: 20 MHz, 40 MHz, 80 MHz, and 160 MHz <p>Combined peak data rate: 2.976 Gbps</p> <ul style="list-style-type: none"> - Radio 1 – 2.4 GHz: 8.6 Mbps to 0.574 Gbps (MCS0 to MCS11) - Radio 2 – 5 GHz: 8.6 Mbps to 2.402 Gbps (MCS0 to MCS11) <p>Radio technologies: uplink/downlink Orthogonal Frequency-Division Multiple Access (OFDMA)</p> <p>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM</p> <p>Packet aggregation:</p> <ul style="list-style-type: none"> - Aggregate MAC Protocol Data Unit (A-MPDU) - Aggregate MAC Service Data Unit (A-MSDU) - Dynamic Frequency Selection (DFS) - Cyclic Delay/Shift Diversity (CDD/CSD) - Maximum Ratio Combining (MRC) - Space-Time Block Coding (STBC) - Low-Density Parity Check (LDPC) - Transmit beam-forming (TxBF) - WPA3 |
| Antennas | <p>Wi-Fi</p> <ul style="list-style-type: none"> - 2.4 GHz: two built-in omnidirectional antennas, the max. antenna gain is 4 dBi. - 5 GHz: two built-in omnidirectional antennas, the max. antenna gain is 6 dBi. <p>Bluetooth</p> <ul style="list-style-type: none"> - One integrated vertically polarized omnidirectional antenna, the max. antenna gain is 5 dBi. |
| Ports | <p>1 x 100/1000Base-T RJ45 Ethernet port with auto-negotiation</p> <p>1 x 2.5GE SFP port</p> <p>1 x RJ45 console port</p> <p>1 x Bluetooth 5.0</p> |
| Status LED | <p>1 x multi-color system status LED</p> <ul style="list-style-type: none"> - AP power-on status - Software initialization status and upgrade status - Uplink service interface status - Wireless user online status - CAPWAP tunnel timeout - Specific AP locating - Three single-color signal strength LEDs: - Whether bridging is enabled - Whether bridging is successful - Wireless signal strength after successful bridging |

OUTDOOR OMNIDIRECTIONAL WiFi 6 ACCESS POINT

AX 3000OLP

- ✓ Designed for outdoor installations (IP68)
- ✓ Dual-band WiFi (2.4 GHz + 5 GHz) IEEE 802.11b/g/n/ac/ax
- ✓ Maximum data speed up to 2.976 Gbps
- ✓ 4 spatial streams
- ✓ MU-MIMO and WMM systems
- ✓ Fast-Intelligent-Roaming (IEEE 802.11k/v/r)
- ✓ Maximum transmission power: 28dBm
- ✓ High WiFi network quality and efficiency (RF power adjustment and intelligent channel allocation)
- ✓ Local and remote management via CloudPRO
- ✓ 1Gbps connection via copper structured cabling (RJ45 connector) or 2.5Gbps via fiber optic (SFP)
- ✓ 48Vdc PoE power supply
- ✓ Bluetooth 5.1
- ✓ High-security protocols (WPA2/802.1X, WPA3P/WPA3 Enterprise)



| | |
|------------------------|--|
| Button | 1 x Reset button Press the button for shorter than 2 seconds. Then the device restarts. Press the button for longer than 5 seconds. Then the device restores to factory settings. |
| Dimensions (W x D x H) | Main unit: 251 mm x 168 mm x 64 mm (9.88 in. x 6.61 in. x 2.52 in.) Shipping: 405 mm x 232 mm x 325 mm (15.94 in. x 9.13 in. x 12.80 in.) |
| Weight | Main unit: 1.0 kg (2.2 lbs) Mounting bracket: 0.9 kg (1.98 lbs) Shipping: 3.15 kg (6.94 lbs) |
| Mounting | Ceiling/Wall/Pole-mount (a mounting bracket is delivered with the main unit) |
| Input power supply | The AP supports the following two power supply modes: 48 Vdc DC/0.35 A power input over DC connector: The DC connector accepts the center-positive circular plug with the inner diameter of 2.0 mm (0.08 in.) or outer diameter of 6.3 mm (0.25 in.) and the length of 9.8 mm (0.39 in.). A DC power supply needs to be purchased independently. PoE input over ETH/PoE: The power source equipment (PSE) complies with IEEE 802.3af/at standard (PoE/PoE+). |
| Power consumption | Maximum power consumption: 12.95 W Vdc power: 12.95 W 802.3at (PoE+): 12.95 W 802.3af (PoE): 12.95 W Idle mode: 6.0 W |
| Environment | Storage temperature: -40°C to +85°C (-40°F to +185°F) Storage humidity: 0% RH to 100% RH (non-condensing) Storage altitude: < 5,000 m (16,404.20 ft.) at 25°C (77°F) Operating temperature: -40°C to +65°C (-40°F to +149°F) Operating humidity: 0% RH to 100% RH (non-condensing) Operating altitude: < 5,000 m (16,404.20 ft.) at 55°C (131°F) |
| IP Rating | IP68 |
| Max transmit power | 2.4 GHz Max. transmit power: 28 dBm (630.96 mW) Minimum transmit power: 10 dBm (10 mW) 5 GHz Max. transmit power: 28 dBm (630.96 mW) Minimum transmit power: 10 dBm (10 mW) |


Software

| | |
|--------------------------------|---|
| WLAN | |
| Max. number of associated STAs | 1024 (up to 512 STAs per radio) |
| Max. number of BSSIDs | 32 (up to 16 BSSIDs per radio) |
| Max. number of WLAN IDs | 16 |
| STA management | SSID hiding Each SSID can be configured with the authentication mode, encryption mechanism, and VLAN attributes independently. Remote Intelligent Perception Technology (RIPT) Intelligent STA identification Intelligent load balancing based on the STA quantity or traffic |
| STA limiting | SSID-based STA limiting Radio-based STA limiting |
| Bandwidth limiting | STA/SSID/AP-based rate limiting |
| CAPWAP | IPv4/IPv6 CAPWAP Layer 2 and Layer 3 topology between an AP and an AC An AP can automatically discover the accessible AC. An AP can be automatically upgraded through the UC AX. An AP can automatically download the configuration file from the UC AX. CAPWAP through NAT |
| Data forwarding | Centralized and local forwarding |
| Wireless roaming | Layer 2 and Layer 3 roaming |
| Wireless locating | MU and TAG device locating |
| Security and Authentication | |
| Authentication and encryption | Remote Authentication Dial-In User Service (RADIUS) PSK and web authentication QR code-based guest authentication, SMS authentication, and MAC address bypass (MAB) authentication Data encryption: WEP (64/128 bits), WPA-TKIP, WPA-PSK, WPA2-AES, WPA3-Individual, WPA3-Enterprise |
| Data frame filtering | Allowlist, static blocklist, and dynamic blocklist |


| | |
|--|---|
| WIDS | Rogue device discovery Optimization of rogue AP containment for all STA types Fuzzy containment SSID-based blocklist DDoS attack identification Automatic detection of STA attacks, and adding STAs to the blocklist when ICMP attacks or TCP SYN attacks are detected STA isolation |
| ACL | IP standard ACL, MAC extended ACL, IP extended ACL, and expert-level ACL IPv6 ACL Time range-based ACL ACL based on a Layer 2 interface ACL based on a Layer 3 interface Ingress ACL based on a wireless interface Dynamic ACL assignment based on 802.1X authentication (used with the AC) |
| CPP | CPU Protect Policy (CPP) |
| NFPF | Network Foundation Protection Policy (NFPF) |
| Routing and Switching | |
| MAC | Static and filtered MAC addresses MAC address table size: 1,024 Max. number of static MAC addresses: 1,024 Max. number of filtered MAC addresses: 1,024 |
| Ethernet | Jumbo frame length: 1,518 Ethernet II 1000M SFP ports modules 2.5G ports |
| VLAN | Interface-based VLAN assignment Layer 2 isolation of wired interfaces (including aggregate interfaces) within VLANs Max. number of SVIs: 191 Max. number of VLANs: 4,094 VLAN ID range: 1-4,094 |
| ARP | ARP entry aging, gratuitous ARP learning, and proxy ARP Max. number of ARP entries: 1,024 Detection of IP address conflicts among downlink hosts ARP check |
| IPv4 services | Static and DHCP-assigned IPv4 addresses Maximum number of configured IPv4 addresses per Layer 3 interface: 200 NAT, FTP ALG, and DNS ALG |
| IPv6 services | IPv6 addressing, Neighbor Discovery (ND), IPv6 ND proxy, ICMPv6, IPv6 ping IPv6 DHCP client |
| IP routing | IPv4/IPv6 static route Max. number of static IPv4 routes: 1,024 Max. number of static IPv6 routes: 1,000 |
| Multicast | Multicast-to-unicast conversion |
| VPN | PPPoE client IPsec VPN |
| Network Management and Monitoring | |
| Network management | NTP server and NTP client SNTP client SNMPv1/v2c/v3 Fault detection and alarm Information statistics and logging |
| Network management platform | Direct connection via web management Remote connection via CloudPRO by EK |
| User access management | Telnet, SSH, FTP client, FTP server, and TFTP client |
| Switchover among Fat, Fit, and cloud modes | When the AP works in Fit mode, it can be switched to Fat mode through a controller (UC AX) When the AP works in Fat mode, it can be switched to Fit mode through the console port or Telnet mode. When the AP works in cloud mode, it can be managed through CloudPRO by EK. |

Antenna Pattern Plots

Horizontal Planes (Top View)

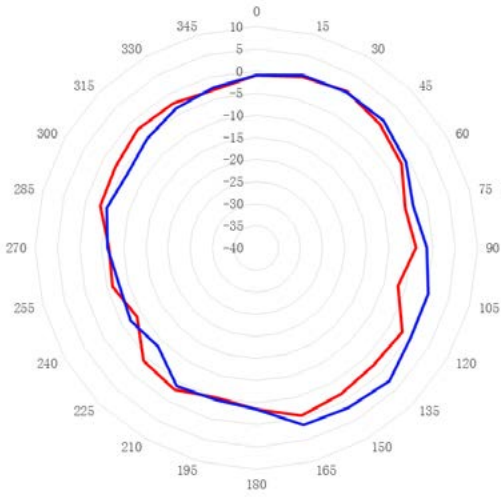


— 2G Azimuth Plane H — 2G Azimuth Plane E

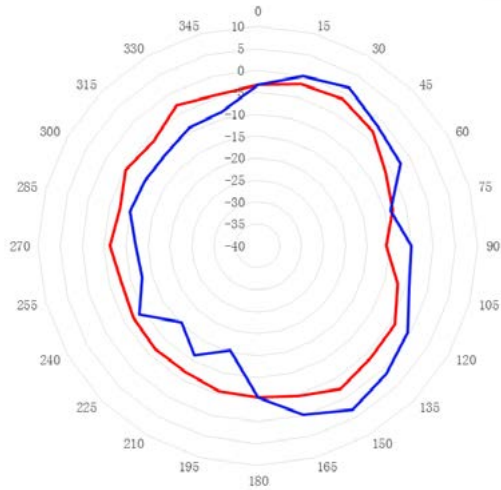


— 5G Azimuth Plane H — 5G Azimuth Plane E

Vertical Planes (Side View, AP Facing Down)

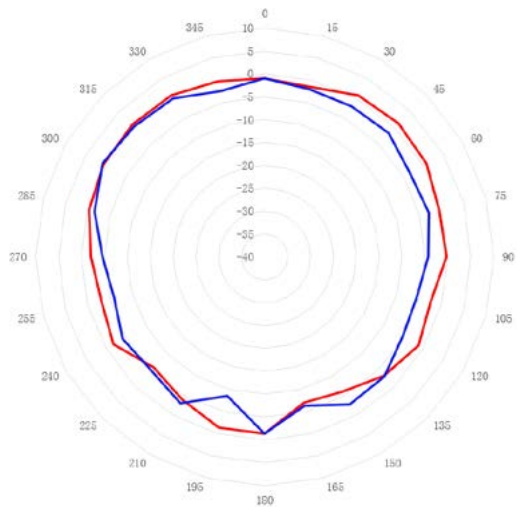

— 2G Azimuth Plane Phi=0 — 2G Azimuth Plane Phi=90

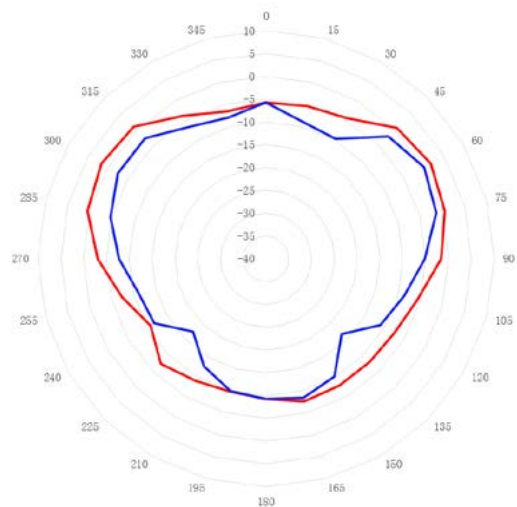

— 5G Azimuth Plane Phi=0 — 5G Azimuth Plane Phi=90

MANAGED ETHERNET SWITCH

Hardware

| REFERENCE | SWG 24 AX |
|---|--|
| Code | 334201 |
| Ports | |
| Fixed service port | 24 x 10/100/1000M electrical ports supporting auto negotiation + 4 x 1GE SFP ports |
| System | |
| Switching capacity | 56 Gbps |
| Packet forwarding rate | 42 Mpps |
| Dimensions and Weight | |
| Dimensions (W x D x H) | 440 mm x 260 mm x 44 mm (17.32 in. x 10.24 in. x 1.73 in.) |
| Power Supply and Consumption | |
| Rated input voltage | AC input: rated voltage range 100 Vdc to 240 Vdc, frequency 50/60 Hz |
| Maximum input voltage | AC input: rated voltage range 90 Vdc to 264 Vdc, frequency 50/60 Hz |
| Input voltage | High voltage DC (HVDC) input: input voltage range 192 V to 290 V |
| PoE power supply | 24 x electrical ports supporting PoE and PoE+ |
| Maximum output power of a PoE interface | Maximum PoE/PoE+ output power: 370 W |
| Environment and Reliability | |
| Fan monitoring | Fan speed adjustment and fault alarms |
| Operating temperature | 0°C to 50°C (32°F to 122°F) |
| Storage temperature | -40°C to +70°C (-40°F to +158°F) |
| Operating humidity | 10% to 90% RH |
| Storage humidity | 5% to 95% RH |
| Operating altitude | -500 m to +5000 m (-1640.42 ft to +16404.20 ft) |

Software

| | |
|-----------|--|
| VLAN | 4K VLANs Interface-based VLAN assignment MAC address-based VLAN assignment Protocol-based VLAN assignment Private VLAN Voice VLAN IP subnet-based VLAN CVRP |
| QinQ | Basic QinQ Selective QinQ |
| ACL | Standard IP ACL Extended IP ACL Extended MAC ACL (hardware ACL based on the source MAC address, destination MAC address, and optional Ethernet type) Time range-based ACL Expert-level ACL (hardware ACL based on flexible combinations of the VLAN ID, Ethernet type, MAC address, IP address, TCP/UDP port ID, protocol type, and time range) ACL 80 IPv6 ACL Global ACL ACL redirection |
| QoS | Rate limiting on an interface based on the ingress or egress Flow-based rate limiting on the ingress or egress 802.1p/DSCP/ToS traffic classification Eight priority queues per interface SP, WRR, DRR, SP+WFO, SP+WRR, SP+DRR, and RED/WRED scheduling |
| Mirroring | Common service interfaces and aggregate interfaces that can be configured as source and destination interfaces of mirroring 1:1, 1:N, N:1, and flow-based local and remote mirroring RSPAN and ERSPAN Cross-device traffic mirroring |
| DHCP | DHCP server DHCP client DHCP snooping DHCP relay IPv6 DHCP snooping IPv6 DHCP client IPv6 DHCP relay |

SWITCH ETHERNET
GESTIONABLE

SWG 24-AX

- ✓ 24 ports 1 Gbps with PoE+ output
- ✓ 4 SFP 1 Gbps ports
- ✓ Maximum PoE+ power: 370W
- ✓ 1U of 19" rack
- ✓ Layer 2+ features
- ✓ VLAN management, QinQ, ACL, QoS, mirroring, multicast, IGMP snooping, ...
- ✓ DHCP server
- ✓ Management through web interface, SNMP, CLI, SSH, ...
- ✓ High energy efficiency (IEEE 802.3az)
- ✓ Web management and remote via CloudPRO by EK



| | |
|---------------------------------|---|
| Layer 2 protocols | IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3x, IEEE 802.3ad, IEEE 802.1p, IEEE 802.1x, IEEE 802.3ab, IEEE 802.1Q (GVRP), IEEE 802.1d, IEEE 802.1w, IEEE 802.1s IEEE 802.1s, and IGMP snooping v1/v2 |
| Security | 3-tuple binding (IP address, MAC address, and interface) 3-tuple binding (IPv6 address, MAC address, and interface) Invalid MAC address filtering Interface- and MAC address-based 802.1X authentication MAC address bypass authentication (MAB) Portal and Portal 2.0 authentication ARP check DAI Trusted ARP ARP spoofing prevention Broadcast or multicast storm suppression Unknown multicast suppression and multicast bandwidth suppression Hierarchical management and password protection RADIUS and TACAS+ AAA (IPv4/IPv6) for device login management SSH and SSHv2.0 BPDU guard IP source guard CPP and NFPP Port protection |
| Cable diagnostics | Cable detection |
| Energy Efficient Ethernet (EEE) | IEEE 802.3az-compliant EEE: When EEE is enabled, power consumption of interfaces is significantly reduced. |
| Port sleeping | Port sleeping |
| PoE | IEEE 802.3af, IEEE 802.3at, and IEEE 802.3bt Automatic and energy-efficient power supply management modes Warm start to implement uninterrupted power supply Interface priority Compatibility with non-standard PDs Scheduled power-on/off of PoE interfaces |
| IP routing | IPv4/IPv6 static route RIP, RIPng, OSPFv2, and OSPFv3 Routing policy |
| IPv6 Basic protocols | IPv6 addressing, Neighbor Discovery (ND), IPv6 ACL, ICMPv6, IPv6 ping, and IPv6 tracer |
| VSU features | VSU Local and remote stacking Cross-chassis link bundling within the stack |
| Zero Touch Provisioning (ZTP) | CWMP (TR-069) standard protocol |
| Management features | SNMP, CLI (Telnet/console), RMON, SSH, Syslog/debugging, NTP/SNTP, FTP, TFTP, web, sFlow and CloudPRO by EK |

CONTROLLER FOR WiFi NETWORKS

CONTROLLER FOR WiFi NETWORKS

| REFERENCE | UC-AX |
|---------------------------------|--|
| Code | 331022 |
| Dimensions and Weight | |
| Physical Dimensions (W x D x H) | 440 mm x 200 mm x 43.6 mm (excluding foot pad) (17.32 in. x 7.87 in. x 1.72 in.) |
| Rack Height | 1 U |
| Weight | Net weight: 2.9 kg (6.39 lbs) |
| Port Specification | |
| Fixed Service Port | Six 10/100/1000Base-T Ethernet ports with auto-negotiation. Port 1 can serve as a management port. Two combo ports. When the electrical port works, 10/100/1000Base-T auto-negotiation is supported. |
| Fixed Management Port | One RJ45 console port Two USB ports |
| Status LED | One system status LED One power status LED 10 service port status LEDs |
| Button | One power switch One reset button |
| Power Supply and Consumption | |
| Max. Power Consumption | 40W |
| Input Voltage | 100V AC to 240V AC-50Hz to 60Hz |
| Output Voltage | 12V/ 3.33A |
| Environment and Reliability | |
| Temperature | Operating temperature: -10°C to +40°C Storage temperature: -40°C to +70°C |
| Humidity | Operating humidity: 10% to 90% RH (non-condensing) Storage humidity: 5% to 95% RH (non-condensing) |
| Safety regulations | GB 4943.1 CE Marked, EN/IEC 62368-1 (replacing EN/IEC 60950-1) Low Voltage Directive 2014/35/EU |
| EMC regulations | EN 300 386, EN301 489, EN 55032 Class A, EN 55035, EN 61000-3-2, EN 61000-3-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11 |

UC-AX

- ✓ High-Performance WiFi Controller
- ✓ Controls and manages medium to large networks both locally and remotely
- ✓ High-capacity load balancing
- ✓ Intelligent WiFi signal management (seamless roaming)
- ✓ Optimized for managing multicast services
- ✓ Supports high security and reliability standards
- ✓ Manages from 32 to 448 access points (*)
- ✓ 8 RJ45 ports or 6 RJ45 ports + 2 SFP ports

(*) Check conditions



UC-AX





EKSELANS BY ITS



www.ek.plus



[ek.plus](https://www.youtube.com/ek.plus)



[ekselansbyits](https://www.linkedin.com/company/ekselansbyits)

EKSELANS by ITS

ITS Partner O.B.S. S.L.U.

Av. Cerdanyola 79-81 Local C

08172 Sant Cugat del Vallès

Barcelona (Espanya)

Tel: +34 93 583 95 43

info@ek.plus

www.ek.plus