


LNBS

LNB 21 MG

Ltè2

- ✓ Monoblock LNB
- ✓ Adjustable multigrade 4.3°-9.0°

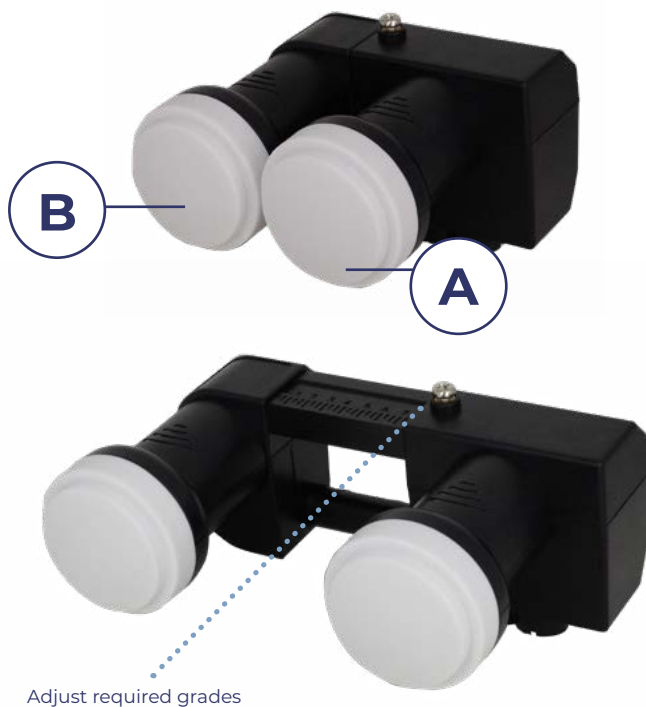

TECHNICAL INFORMATION

REFERENCE		LNB 21 MG		
Code		022026		
Type		Monoblock 4,3-9° - Single		
Input frequency	GHz	10,7 - 11,7 / 11,7 - 12,75		
O.L.1 frequency	GHz	9,75		
O.L.2 frequency	GHz	10,60		
O.L. stability	MHz			
B1 output frequency	MHz	950 - 1950		
B2 output frequency	MHz	1100 - 2150		
Gain	dB	62 (max)		
Channel flatness	dB / MHz	±0,5 / 27		
Noise figure	dB	0,3		
Phase noise	dBc/KHz	-60/1	-80/10	-100/100
In-band spurious	dBm	-40(min)		
Feeding / Polar. Control	Vdc	10,5...21		
Consumption	mA	110 (max)		
Operating temperature	°C	-40...+60		
DiSEqC		DiSEqC 1.0	A: ASTRA 19.2°	B: Hotbird 13°
SWR		2:1		
Output impedance	Ω	75		