

---

# WiFi SENSORS

---




## WS CO2 EK

- √ WiFi sensor CO<sup>2</sup> (Smoke sensor)
- √ Super low power consumption, 5 year long battery life.
- √ Mini design.
- √ EkSmart APP control.
- √ Real-Time push notifications: Receive real-time alerts when the device detects danger or any malfunction so you can take action quickly, helping keep your property and home safe 24/7.
- √ Self-check function and photoelectric sensor: An automatic self-test checks the sensor, electronics, and battery function to ensure proper operation, advanced photoelectric technology allows it to accurately detect smoldering fires in seconds, alerting you instantly.
- √ Remote mute via App: Just tap a button in the app to mute unwanted alarms, no more climbing a ladder, convenient to use. (Duration of 10 minutes with active alert, 12 hours on low battery)
- √ Certification: EN14604



## WS CO2 EK

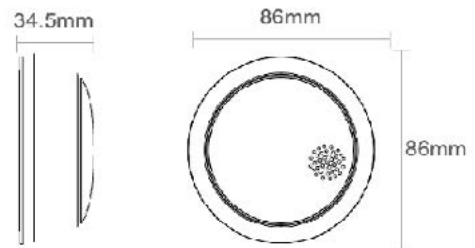



## TECHNICAL TABLE

REFERENCE		WS CO2 EK
Code		421001
Working Voltage		DC3V (1* CRI 23A/ CRI 7335 Lithium battery)
Battery Life		5 years(depend on triggered frequency and WIFI quality in actual use)
Battery		Included
Sensor Type		Infrared photoelectric
Alarm Signal		Sound and light indication
Alarm Volume	dB / m	85 / 3
Communication Protocol		WIFI 2.4Ghz + Bluetooth easy connect
Communication Distance		WiFi signal covered a rea
Operating Temperature	°C	0 ~ +55
Operating Humidity	%	s;95 RH (no condensation)
Dimensions	mm	86 x 86 x 34,5